
Remove Residual Magnetism

Tunnel Type Demagnetizer with Belt Conveyor system

MagTECH ASSOCIATES
SINCE1996
Manufacturing Magnetic Product as per Clients Requirements



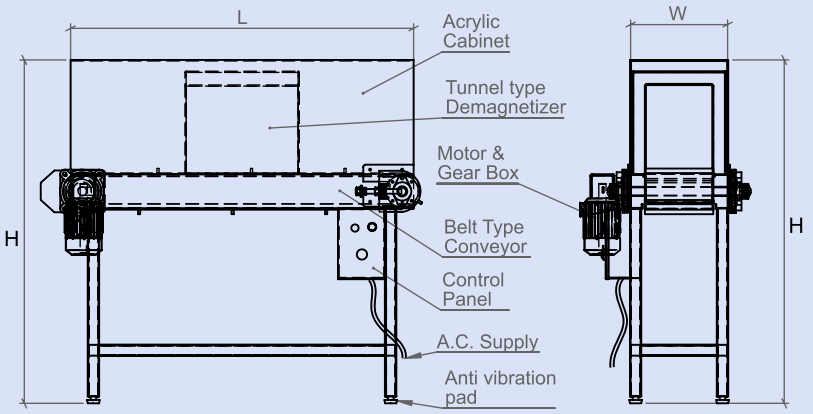

Application

Demagnetizer is designed to eliminate Residual Magnetism of work piece, which is generated due to manufacturing process like turning milling grinding operations and due to contact with magnet also. Sizes and models can vary as per requirement. Magnetism can be verified by the GAUSS METER.

How to operate

a) Provide a suitable supply to demagnetizer
b) It is operated by Programable logic control panel. (PLC)
c) The work piece is passed through tunnel from start to end.

How to check performance

a) Check residual magnetism of work piece by Residual Field meter (Gauss Meter). BEFORE demagnetizing.
b) Demagnetize it as per above instructions.
c) Check residual magnetism of work piece by Residual Field meter (Gauss Meter)AFTER demagnetizing.

Area of application

Production department, Packing department ,Tool Room and standard Room, Press Shop, Assembly line etc.

Advantages

Increases tool life. Increases productivity Increases quality.

Available sizes

Model Code No.	Overall Size (L x W x H)
023-07-01	L1500xW450 x H1500mm
023-07-02	L2000 xW600 x H1500mm

Magtech Associates



Applications







Tel. : (020) 2749 09 53, **Mob** : +91 9850 08 69 39 (Yogesh Naik) **Email** : yogeshnaik@magtechassociates.com, magyog@gmail.com,
Website : www.magtechassociates.com, www.demagnetizerpune.com