
SINCE1996

MagTECH ASSOCIATES

Manufacturing Magnetic Product as per Clients Requirements

Tool Room Equipments

Magnetic 'V' Block

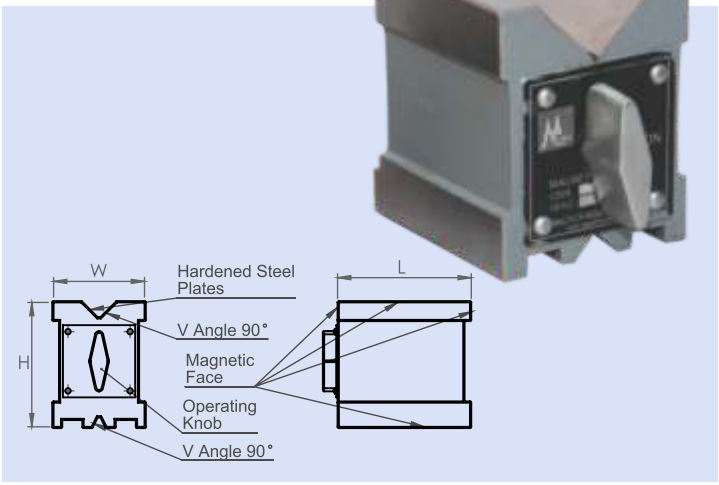

Purpose

Magnetic 'V' block is basically a clamping device. Hence it used in Standard Room, Tool Room and Shop Floor also. For Drilling , Grinding, Light Milling operations.

It consist Three magnetic Surface Top, bottom with 90 degree angle and end surface opposite from switch. Magnetic surfaces are activated by mechanical ON-OFF switch. The main 'V' angle and bottom surface are provided with hardened steel plates, that ensures extra wear resistance.

The accuracy of flatness and parallelism and squareness is within 5 microns for 4" & 6", as well as 10 microns for 8" 'V' blocks

Magtech Associates

Construction

It consist powerful Nd Fe B grade magnet, High permeability low carbon steel , Aluminium etc.

Advantages

a) Rigid clamping
b) Easy for handling.
c) Increases productivity.

Area of application

All tool room/ standard room , Machine shop etc.

Available sizes

Model Code	Size (L x W xH)	Clamping Range	Pulling Force
004-01-01	40 x50x40mm (2")	3 to 25mm	25 kgs
004-01-02	75 x75x56mm (3")	5 to 40mm	75 kgs
004-01-03	100 x95x70mm (4")	5 to 65mm	125 kgs
004-01-04	150 x100x75mm (6")	5 to 70mm	150 kgs
004-01-05	200 x150x125mm (8")	10 to 40mm	175 kgs

Tel. : (020) 2749 09 53, Mob : +91 9850 08 69 39 (Yogesh Naik)
Email : yogeshnaik@magtechassociates.com, magyog@gmail.com,
Website : www.magtechassociates.com, www.demagnetizerpune.com